
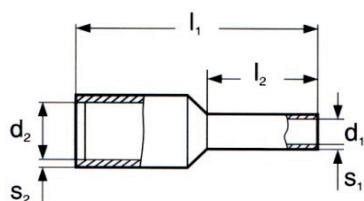


Dutinky izolované



Použitý materiál: dutinka - měď galvanicky cínovaná

izolace - Polypropylen (PP)


Teplotní stálost izolace: -55°C až +105°C

Vyrobeno dle normy: DIN 46228

Průřez (mm ²)	Označení	Kód			Rozměry (mm)					Hmotnost	Balení	
		1. N	2. F	3. DIN	l ₁	l ₂	d ₁	d ₂	s ₁	s ₂	(kg/1000ks)	(ks)
0,14	DI 0,14-6				10,4	6,0	0,7	1,6	0,1	0,2	0,03	500 / 100
	DI 0,14-8				12,4	8,0	0,7	1,6	0,1	0,2	0,04	500 / 100
0,25	DI 0,25-6				10,5	6,0	0,75	2,0	0,25	0,25	0,045	500 / 100
	DI 0,25-8				12,5	8,0	0,75	2,0	0,25	0,25	0,050	500 / 100
0,34	DI 0,34-6				10,5	6,0	0,75	2,0	0,25	0,25	0,045	500 / 100
	DI 0,34-8				12,5	8,0	0,75	2,0	0,25	0,25	0,050	500 / 100
0,50	DI 0,5-6				12,0	6,0	1,0	2,6	0,15	0,25	0,070	500 / 100
	DI 0,5-8				14,0	8,0	1,0	2,6	0,15	0,25	0,075	500 / 100
	DI 0,5-10				16,0	10,0	1,0	2,6	0,15	0,25	0,085	500 / 100
0,75	DI 0,75-6				12,0	6,0	1,2	2,8	0,15	0,25	0,080	500 / 100
	DI 0,75-8				14,0	8,0	1,2	2,8	0,15	0,25	0,090	500 / 100
	DI 0,75-10				16,0	10,0	1,2	2,8	0,15	0,25	0,100	500 / 100
	DI 0,75-12				18,0	12,0	1,2	2,8	0,15	0,25	0,105	500 / 100
1,0	DI 1,0-6				12,0	6,0	1,4	3,0	0,15	0,25	0,090	500 / 100
	DI 1,0-8				14,0	8,0	1,4	3,0	0,15	0,25	0,100	500 / 100
	DI 1,0-10				16,0	10,0	1,4	3,0	0,15	0,25	0,120	500 / 100
	DI 1,0-12				18,0	12,0	1,4	3,0	0,15	0,25	0,125	500 / 100
1,5	DI 1,5-6				12,0	6,0	1,7	3,5	0,15	0,25	0,105	500 / 100
	DI 1,5-8				14,0	8,0	1,7	3,5	0,15	0,25	0,110	500 / 100
	DI 1,5-10				16,0	10,0	1,7	3,5	0,15	0,25	0,130	500 / 100
	DI 1,5-12				18,0	12,0	1,7	3,5	0,15	0,25	0,140	500 / 100
	DI 1,5-18				24,0	18,0	1,7	3,5	0,15	0,25	0,190	500 / 100
2,5	DI 2,5-8				14,0	8,0	2,2	4,2	0,15	0,25	0,150	500 / 100
	DI 2,5-10				16,0	10,0	2,2	4,2	0,15	0,25	0,175	500 / 100
	DI 2,5-12				18,0	12,0	2,2	4,2	0,15	0,25	0,200	500 / 100
	DI 2,5-18				24,0	18,0	2,2	4,2	0,15	0,25	0,250	500 / 100
4	DI 4-10				17,0	10,0	2,8	4,8	0,2	0,3	0,210	500 / 100
	DI 4-12				20,0	12,0	2,8	4,8	0,2	0,3	0,250	500 / 100
	DI 4-18				26,0	18,0	2,8	4,8	0,2	0,3	0,320	100
6	DI 6-12				20,0	12,0	3,5	6,3	0,2	0,3	0,350	100
	DI 6-18				26,0	18,0	3,5	6,3	0,2	0,3	0,460	100
10	DI 10-12				22,0	12,0	4,5	7,6	0,2	0,4	0,450	100
	DI 10-18				28,0	18,0	4,5	7,6	0,2	0,4	0,650	100






Dutinky izolované

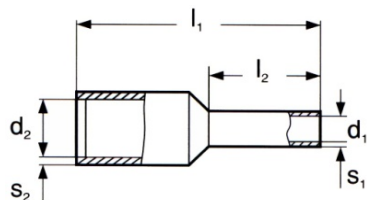

Použitý materiál: dutinka - měď galvanicky cínovaná
 izolace - Polypropylen (PP)
 Teplotní stálost izolace: -55°C až +105°C
 Vyrobeno dle normy: DIN 46228

Průřez (mm ²)	Označení	Kód			Rozměry (mm)						Hmotnost (kg/1000ks)	Balení (ks)
		1. N	2. F	3. DIN	l ₁	l ₂	d ₁	d ₂	s ₁	s ₂		
16	DI 16-12				24,0	12,0	5,8	8,8	0,2	0,4	0,650	100
	DI 16-18				28,0	18,0	5,8	8,8	0,2	0,4	0,800	100
25	DI 25-16				29,0	16,0	7,3	11,2	0,2	0,4	1,600	50
	DI 25-18				31,0	18,0	7,3	11,2	0,2	0,4	1,700	50
	DI 25-22				36,0	22,0	7,3	11,2	0,2	0,4	2,000	50
35	DI 35-16				30,0	16,0	8,3	12,7	0,2	0,4	1,900	50
	DI 35-18				32,0	18,0	8,3	12,7	0,2	0,4	2,100	50
	DI 35-25				39,0	25,0	8,3	12,7	0,2	0,4	2,500	50
50	DI 50-20				36,0	20,0	10,3	15,0	0,3	0,5	3,300	50
	DI 50-25				40,0	25,0	10,3	15,0	0,3	0,5	3,600	50
70	DI 70-20				37,0	20,0	12,5	16,0	0,4	0,6	4,620	25
95	DI 95-25				44,0	25,0	14,5	18,0	0,4	0,6	6,000	25
120	DI 120-27				48,0	27,0	16,5	21,0	0,5	0,7	7,850	25
150	DI 150-32				58,0	32,0	19,3	23,0	0,5	1,0	12,330	25


Dutinky v páscích

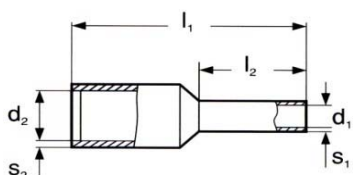

Použitý materiál: dutinka - měď galvanicky cínovaná
 izolace - Polypropylen (PP)
 Teplotní stálost izolace: -55°C až +105°C
 Vyrobeno dle normy: DIN 46228

Průřez (mm ²)	Označení	Kód			Rozměry (mm)						Hmotnost (kg/1000ks)	Balení (ks)
		1. N	2. F	3. DIN	l ₁ / l ₂	r	d ₁	d ₂	s ₁	s ₂		
0,5	DP 0,5-8				14 / 8	3,6	1,0	2,8	0,15	0,30	0,090	500
0,75	DP 0,75-8				14 / 8	3,6	1,2	2,8	0,15	0,30	0,095	500
1,0	DP 1,0-8				14 / 8	4,2	1,4	3,3	0,15	0,30	0,110	500
1,5	DP 1,5-8				14 / 8	4,2	1,7	3,3	0,15	0,30	0,120	500
2,5	DP 2,5-8				14 / 8	5,0	2,2	4,2	0,15	0,30	0,160	500






Dutinky neizolované

Použitý materiál: měď

Povrchová úprava: galvanické cínování

Vyrobena dle normy: DIN 46228

Průřez (mm ²)	Označení	Rozměry (mm)				Hmotnost (kg/1000ks)	Balení (ks)
		l	d ₁	d ₂	s		
0,14	DN 0,14-7	7,00	0,70	1,60	0,15	0,020	1000 / 100
0,25	DN 0,25-5	5,00	0,75	1,70	0,15	0,020	1000 / 100
	DN 0,25-7	7,00	0,75	1,70	0,15	0,030	1000 / 100
0,34	DN 0,34-5	5,00	0,85	1,80	0,15	0,020	1000 / 100
	DN 0,34-7	7,00	0,85	1,80	0,15	0,030	1000 / 100
0,50	DN 0,5-6	6,00	1,00	2,10	0,15	0,030	1000 / 100
	DN 0,5-8	8,00	1,00	2,10	0,15	0,040	1000 / 100
	DN 0,5-10	10,00	1,00	2,10	0,15	0,050	1000 / 100
	DN 0,5-12	12,00	1,00	2,10	0,15	0,060	1000 / 100
0,75	DN 0,75-6	6,00	1,20	2,30	0,15	0,040	1000 / 100
	DN 0,75-8	8,00	1,20	2,30	0,15	0,050	1000 / 100
	DN 0,75-10	10,00	1,20	2,30	0,15	0,060	1000 / 100
	DN 0,75-12	12,00	1,20	2,30	0,15	0,080	1000 / 100
	DN 0,75-15	15,00	1,20	2,30	0,15	0,090	1000 / 100
1,0	DN 1,0-6	6,00	1,40	2,50	0,15	0,040	1000 / 100
	DN 1,0-8	8,00	1,40	2,50	0,15	0,060	1000 / 100
	DN 1,0-10	10,00	1,40	2,50	0,15	0,070	1000 / 100
	DN 1,0-12	12,00	1,40	2,50	0,15	0,080	1000 / 100
	DN 1,0-15	15,00	1,40	2,50	0,15	0,100	1000 / 100
	DN 1,0-18	18,00	1,40	2,50	0,15	0,120	1000 / 100
1,5	DN 1,5-6	6,00	1,70	2,80	0,15	0,050	1000 / 100
	DN 1,5-7	7,00	1,70	2,80	0,15	0,060	1000 / 100
	DN 1,5-8	8,00	1,70	2,80	0,15	0,070	1000 / 100
	DN 1,5-10	10,00	1,70	2,80	0,15	0,090	1000 / 100
	DN 1,5-12	12,00	1,70	2,80	0,15	0,100	1000 / 100
	DN 1,5-15	15,00	1,70	2,80	0,15	0,130	1000 / 100
	DN 1,5-18	18,00	1,70	2,80	0,15	0,150	1000 / 100
	DN 1,5-20	20,00	1,70	2,80	0,15	0,170	1000 / 100
2,5	DN 2,5-7	7,00	2,20	3,40	0,15	0,080	1000 / 100
	DN 2,5-8	8,00	2,20	3,40	0,15	0,090	1000 / 100
	DN 2,5-10	10,00	2,20	3,40	0,15	0,110	1000 / 100
	DN 2,5-12	12,00	2,20	3,40	0,15	0,130	1000 / 100
	DN 2,5-15	15,00	2,20	3,40	0,15	0,170	1000 / 100
	DN 2,5-18	18,00	2,20	3,40	0,15	0,200	1000 / 100
	DN 2,5-20	20,00	2,20	3,40	0,15	0,220	1000 / 100
4,0	DN 4-9	9,00	2,80	4,00	0,20	0,160	500 / 100
	DN 4-10	10,00	2,80	4,00	0,20	0,170	500 / 100
	DN 4-12	12,00	2,80	4,00	0,20	0,200	500 / 100
	DN 4-15	15,00	2,80	4,00	0,20	0,270	500 / 100
	DN 4-18	18,00	2,80	4,00	0,20	0,320	500 / 100
	DN 4-20	20,00	2,80	4,00	0,20	0,350	500 / 100





Dutinky neizolované

Použitý materiál: měď
Povrchová úprava: galvanické cínování
Vyrobeno dle normy: DIN 46228

Průřez (mm ²)	Označení	Rozměry (mm)				Hmotnost (kg/1000ks)	Balení (ks)
		l	d ₁	d ₂	s		
6,0	DN 6-10	10,00	3,50	4,70	0,20	0,230	250 / 100
	DN 6-12	12,00	3,50	4,70	0,20	0,270	250 / 100
	DN 6-15	15,00	3,50	4,70	0,20	0,340	100
	DN 6-18	18,00	3,50	4,70	0,20	0,400	100
	DN 6-20	20,00	3,50	4,70	0,20	0,450	100
10	DN 10-12	12,00	4,50	5,80	0,20	0,330	100
	DN 10-15	15,00	4,50	5,80	0,20	0,410	100
	DN 10-18	18,00	4,50	5,80	0,20	0,490	100
	DN 10-20	20,00	4,50	5,80	0,20	0,550	100
	DN 10-25	25,00	4,50	5,80	0,20	0,680	100
16	DN 16-12	12,00	5,80	7,50	0,20	0,430	100
	DN 16-15	15,00	5,80	7,50	0,20	0,530	100
	DN 16-18	18,00	5,80	7,50	0,20	0,600	100
	DN 16-20	20,00	5,80	7,50	0,20	0,700	100
	DN 16-25	25,00	5,80	7,50	0,20	0,870	100
	DN 16-32	32,00	5,80	7,50	0,20	1,110	100
25	DN 25-12	12,00	7,30	9,50	0,20	0,800	50
	DN 25-15	15,00	7,30	9,50	0,20	0,990	50
	DN 25-18	18,00	7,30	9,50	0,20	1,180	50
	DN 25-25	25,00	7,30	9,50	0,20	1,630	50
	DN 25-32	32,00	7,30	9,50	0,20	2,070	50
35	DN 35-12	12,00	8,30	11,00	0,20	0,900	50
	DN 35-15	15,00	8,30	11,00	0,20	1,120	50
	DN 35-18	18,00	8,30	11,00	0,20	1,340	50
	DN 35-20	20,00	8,30	11,00	0,20	1,480	50
	DN 35-25	25,00	8,30	11,00	0,20	1,800	50
	DN 35-32	32,00	8,30	11,00	0,20	2,350	50
50	DN 50-18	18,00	10,30	13,00	0,30	1,690	50
	DN 50-22	22,00	10,30	13,00	0,30	2,050	50
	DN 50-25	25,00	10,30	13,00	0,30	2,320	50
	DN 50-32	32,00	10,30	13,00	0,30	2,950	50
70	DN 70-25	25,00	12,50	15,00	0,40	3,750	50
	DN 70-32	32,00	12,50	15,00	0,40	4,780	50
95	DN 95-25	25,00	14,50	17,00	0,40	4,320	50
	DN 95-32	32,00	14,50	17,00	0,40	5,170	50
120	DN 120-32	32,00	16,50	19,00	0,50	7,830	25
150	DN 150-32	32,00	18,50	21,00	0,50	8,750	25
	DN 150-38	38,00	18,50	21,00	0,50	10,360	25
185	DN 185-32	32,00	20,00	23,50	0,60	11,380	25
	DN 185-40	40,00	20,00	23,50	0,60	14,170	25
240	DN 240-40	40,00	22,80	25,80	0,60	13,230	25

Dutinky dvojité

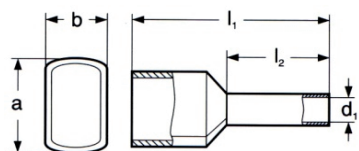

Použitý materiál: dutinka - měď galvanicky cínovaná

izolace - Polypropylen (PP)

Teplotní stálost izolace: -55°C až +105°C


Vyrobeno dle normy: DIN 46228

Průřez (mm ²)	Označení	Kód			Rozměry (mm)					Hmotnost (kg/1000ks)	Balení (ks)
		1. N	2. F	3. DIN	l ₁	l ₂	d ₁	a	b		
2 x 0,25	DD 0,25-8				15,0	8,0	1,15	4,4	2,7	0,115	500 / 100
2 x 0,34	DD 0,34-8				15,0	8,0	1,15	4,4	2,7	0,119	500 / 100
2 x 0,5	DD 0,5-6				13,0	6,0	1,5	4,5	2,7	0,104	500 / 100
	DD 0,5-8				15,0	8,0	1,5	4,5	2,7	0,119	500 / 100
	DD 0,5-10				17,0	10,0	1,5	4,5	2,7	0,134	500 / 100
	DD 0,5-12				19,0	12,0	1,5	4,5	2,7	0,149	500 / 100
2 x 0,75	DD 0,75-8				14,5	8,0	1,7	5,5	3,0	0,134	500 / 100
	DD 0,75-10				15,4	10,0	1,7	5,5	3,0	0,149	500 / 100
	DD 0,75-12				17,4	12,0	1,7	5,5	3,0	0,164	500 / 100
	DD 0,75-18				23,4	18,0	1,7	5,5	3,0	0,179	500 / 100
2 x 1,0	DD 1,0-8				15,8	8,0	1,95	6,5	3,6	0,157	500 / 100
	DD 1,0-10				17,6	10,0	1,95	6,5	3,6	0,177	500 / 100
	DD 1,0-12				19,6	12,0	1,95	6,5	3,6	0,197	500 / 100
	DD 1,0-18				25,6	18,0	1,95	6,5	3,6	0,217	500 / 100
2 x 1,5	DD 1,5-8				15,8	8,0	2,3	6,5	3,6	0,188	500 / 100
	DD 1,5-12				19,6	12,0	2,3	6,5	3,6	0,229	500 / 100
	DD 1,5-18				25,6	18,0	2,3	6,5	3,6	0,265	100
2 x 2,5	DD 2,5-10				18,5	10,0	2,9	8,0	4,5	0,328	250 / 100
	DD 2,5-13				20,0	13,0	2,9	8,0	4,5	0,371	250 / 100
	DD 2,5-18				25,0	18,0	2,9	8,0	4,5	0,414	100
2 x 4	DD 4-12				23,0	12,0	3,8	8,5	4,8	0,511	100
	DD 4-18				27,8	18,0	4,0	8,5	4,8	0,556	100
2 x 6	DD 6-14				25,0	14,0	4,9	9,6	5,8	0,720	100
	DD 6-18				28,9	18,0	4,9	10,5	5,8	0,820	100
2 x 10	DD 10-14				26,0	14,0	6,5	12,6	7,0	0,916	100
	DD 10-18				30,0	18,0	6,5	12,6	7,0	1,066	100
2 x 16	DD 16-14				33,0	14,0	8,5	16,6	8,8	1,335	50
	DD 16-16				35,0	16,0	8,5	16,6	8,8	1,385	50
	DD 16-25				44,0	25,0	8,5	16,6	8,8	1,460	50





Dutinky izolované s velkým plastovým límcem pro zkratovací vodiče s extra silnou izolací

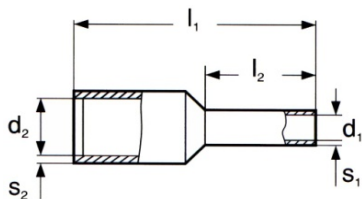


Použitý materiál: dutinka - měď galvanicky cínovaná

izolace - Polypropylen (PP)

Teplotní stálost izolace: -55°C až +105°C

Průřez (mm ²)	Označení	Kód			Rozměry (mm)					Hmotnost (kg/1000ks)	Balení (ks)
		1. N	2. F	3. DIN	l ₁	l ₂	d ₁	d ₂	s ₁		
1,5	DIZ 1,5-8				17,5	8,0	1,7	7,5	0,15	0,249	100
	DIF 1,5-8				17,5	8,0	1,8	6,4	0,15	0,245	100
	DIZ 1,5-10				19,5	10,0	1,7	7,5	0,15	0,263	100
	DIF 1,5-10				19,5	10,0	1,8	6,4	0,15	0,259	100
2,5	DIZ 2,5-8				17,5	8,0	2,2	8,0	0,15	0,275	100
	DIF 2,5-8				17,5	8,0	2,3	7,3	0,15	0,270	100
	DIZ 2,5-12				21,5	12,0	2,2	8,0	0,15	0,305	100
	DIF 2,5-12				21,5	12,0	2,3	7,3	0,15	0,300	100
4	DIZ 4-10				19,5	10,0	2,8	9,5	0,20	0,398	100
	DIF 4-10				19,5	10,0	2,9	7,3	0,20	0,393	100
6	DIZ 6-12				23,0	12,0	3,5	10,0	0,20	0,552	100
	DIF 6-12				23,0	12,0	3,6	8,1	0,20	0,545	100
10	DIZ 10-12				24,0	12,0	4,5	11,5	0,20	0,694	100
	DIF 10-12				24,0	12,0	4,6	9,6	0,20	0,687	100
16	DIZ 16-12				25,5	12,0	5,8	13,5	0,20	0,970	100
	DIF 16-12				25,5	12,0	6,0	11,9	0,20	0,953	100

Dutinky v rolích



Použitý materiál: dutinka - měď galvanicky cínovaná

izolace - Polypropylen (PP)

Teplotní stálost izolace: -55°C až +105°C

Vyrobeno dle normy: DIN 46228

Dutinky v malých rolích pro zpracování v lisovacích automatech.

Průřez (mm ²)	Označení	Kód			Rozměry (mm)						Balení (ks)
		1. N	2. F	3. DIN	l_1 / l_2	r	d_1	d_2	s_1	s_2	
0,5	DRM 0,5-8				14 / 8	3,6	1,0	2,8	0,15	0,30	1100
0,75	DRM 0,75-8				14 / 8	3,6	1,2	2,8	0,15	0,30	1100
1,0	DRM 1,0-8				14 / 8	4,2	1,4	3,3	0,15	0,30	800
1,5	DRM 1,5-8				14 / 8	4,2	1,7	3,3	0,15	0,30	800
2,5	DRM 2,5-8				15 / 8	5,0	2,2	4,2	0,15	0,30	500



Dutinky v malých rolích pro zpracování v lisovacím automatu MC 25.

Průřez (mm ²)	Označení	Kód			Rozměry (mm)						Balení (ks)
		1. N	2. F	3. DIN	l_1 / l_2	r	d_1	d_2	s_1	s_2	
0,5	DRMC 0,5-8				14 / 8	3,6	1,0	2,8	0,15	0,30	1000
0,75	DRMC 0,75-8				14 / 8	3,6	1,2	2,8	0,15	0,30	1000
1,0	DRMC 1,0-8				14 / 8	4,2	1,4	3,3	0,15	0,30	1000
1,5	DRMC 1,5-8				14 / 8	4,2	1,7	3,3	0,15	0,30	1000
2,5	DRMC 2,5-8				15 / 8	5,0	2,2	4,2	0,15	0,30	500



Dutinky ve velkých rolích pro zpracování v lisovacích automatech.

Průřez (mm ²)	Označení	Kód			Rozměry (mm)						Balení (ks)
		1. N	2. F	3. DIN	l_1 / l_2	r	d_1	d_2	s_1	s_2	
0,5	DRS 0,5-8				14 / 8	3,6	1,0	2,8	0,15	0,30	10000
0,75	DRS 0,75-8				14 / 8	3,6	1,2	2,8	0,15	0,30	10000
1,0	DRS 1,0-8				14 / 8	4,2	1,4	3,3	0,15	0,30	7500
1,5	DRS 1,5-8				14 / 8	4,2	1,7	3,3	0,15	0,30	7500
2,5	DRS 2,5-8				15 / 8	5,0	2,2	4,2	0,15	0,30	5000



Plastové dózy s dutinkami izolovanými

Použitý materiál: dutinka - měď galvanicky cínovaná
izolace - Polypropylen (PP)

Teplotní stálost izolace: -55°C až +105°C

Označení	Obsah dózy		Průřez (mm ²)	Množství (ks)
	typ dutinek	barva		
PDI 0525/1	DI 0,5-8	oranžová	0,5	100
	DI 0,75-8	bílá	0,75	100
	DI 1-8	žlutá	1,0	100
	DI 1,5-8	červená	1,5	100
	DI 2,5-8	modrá	2,5	50
PDI 0525/2	DI 0,5-8	bílá	0,5	100
	DI 0,75-8	modrá	0,75	100
	DI 1-8	rudá	1,0	100
	DI 1,5-8	černá	1,5	100
	DI 2,5-8	šedá	2,5	50
PDI 0525/3	DI 0,5-8	bílá	0,5	100
	DI 0,75-8	šedá	0,75	100
	DI 1-8	rudá	1,0	100
	DI 1,5-8	černá	1,5	100
	DI 2,5-8	modrá	2,5	50
PDI 1-6/1	DI 1-8	žlutá	1,0	100
	DI 1,5-8	červená	1,5	100
	DI 2,5-8	modrá	2,5	100
	DI 4-10	šedá	4,0	50
	DI 6-12	černá	6,0	20
PDI 1-6/2	DI 1-8	rudá	1,0	100
	DI 1,5-8	černá	1,5	100
	DI 2,5-8	šedá	2,5	100
	DI 4-10	oranžová	4,0	50
	DI 6-12	zelená	6,0	20
PDI 1-6/3	DI 1-8	rudá	1,0	100
	DI 1,5-8	černá	1,5	100
	DI 2,5-8	modrá	2,5	100
	DI 4-10	šedá	4,0	50
	DI 6-12	žlutá	6,0	20
PDI 416/1	DI 4-10	šedá	4,0	50
	DI 6-12	černá	6,0	20
	DI 10-12	slonová kost	10,0	20
	DI 16-12	zelená	16,0	10
PDI 416/2	DI 4-10	oranžová	4,0	50
	DI 6-12	zelená	6,0	20
	DI 10-12	hnědá	10,0	20
	DI 16-12	bílá	16,0	10
PDI 416/3	DI 4-10	šedá	4,0	50
	DI 6-12	žlutá	6,0	20
	DI 10-12	rudá	10,0	20
	DI 16-12	modrá	16,0	10



Plastové dózy s dutinkami dvojitými

Použitý materiál: dutinka - měď galvanicky cínovaná
izolace - Polypropylen (PP)

Teplotní stálost izolace: -55°C až +105°C

Označení	Obsah dózy		Průřez (mm ²)	Množství (ks)
	typ dutinek	barva		
PDD 0525/1	DD 0,5-8	oranžová	2 x 0,5	50
	DD 0,75-8	bílá	2 x 0,75	50
	DD 1-8	žlutá	2 x 1,0	75
	DD 1,5-8	červená	2 x 1,5	75
	DD 2,5-10	modrá	2 x 2,5	25
PDD 0525/2	DD 0,5-8	bílá	2 x 0,5	50
	DD 0,75-8	modrá	2 x 0,75	50
	DD 1-8	rudá	2 x 1,0	75
	DD 1,5-8	černá	2 x 1,5	75
	DD 2,5-10	šedá	2 x 2,5	25
PDD 0525/3	DD 0,5-8	bílá	2 x 0,5	50
	DD 0,75-8	šedá	2 x 0,75	50
	DD 1-8	rudá	2 x 1,0	75
	DD 1,5-8	černá	2 x 1,5	75
	DD 2,5-10	modrá	2 x 2,5	25



Plastové dózy s dutinkami neizolovanými

Použitý materiál: dutinka - měď galvanicky cínovaná

Označení	Obsah dózy		Průřez (mm ²)	Množství (ks)
	typ dutinek			
PDN 0525/6	DN 0,5-6		0,5	500
	DN 0,75-6		0,75	500
	DN 1-6		1,0	500
	DN 1,5-6		1,5	300
	DN 2,5-7		2,5	200
PDN 0525/8	DN 0,5-8		0,5	500
	DN 0,75-8		0,75	500
	DN 1-8		1,0	500
	DN 1,5-8		1,5	300
	DN 2,5-7		2,5	200
PDN 416	DN 4-9		4,0	100
	DN 6-10		6,0	100
	DN 10-12		10,0	50
	DN 16-12		16,0	25



Plastové dózy s dutinkami izolovanými

Použitý materiál: dutinka - měď galvanicky cínovaná

izolace - Polypropylen (PP)

Teplotní stálost izolace: -55°C až +105°C

Průřez (mm ²)	Označení	Kód			Rozměry (mm)						Množství (ks)
		1. N	2. F	3. DIN	l ₁	l ₂	d ₁	d ₂	s ₁	s ₂	
0,5	PDI 0,5-8				14,0	8,0	1,0	2,6	0,15	0,25	1000
0,75	PDI 0,75-8				14,0	8,0	1,2	2,8	0,15	0,25	1000
	PDI 0,75-10				16,0	10,0	1,2	2,8	0,15	0,25	1000
1,0	PDI 1,0-8				14,0	8,0	1,4	3,0	0,15	0,25	1000
	PDI 1,0-10				16,0	10,0	1,4	3,0	0,15	0,25	1000
1,5	PDI 1,5-8				14,0	8,0	1,7	3,5	0,15	0,25	1000
	PDI 1,5-10				16,0	10,0	1,7	3,5	0,15	0,25	1000
2,5	PDI 2,5-8				14,0	8,0	2,2	4,2	0,15	0,25	1000
4	PDI 4-10				17,0	10,0	2,8	4,8	0,2	0,3	500
6	PDI 6-12				20,0	12,0	3,5	6,3	0,2	0,3	500

Plastové dózy prázdné.

Označení	Popis	Balení (ks)
PD 1	Plastová dóza 1-dílná prázdná bez potisku	1
PD 4	Plastová dóza 4-dílná prázdná s potiskem průřezů 4,0 - 10 mm ²	1
PD 4N	Plastová dóza 4-dílná prázdná bez potisku	1
PD 5	Plastová dóza 5-dílná prázdná s potiskem průřezů 0,5 - 2,5 mm ²	1
PD 5N	Plastová dóza 5-dílná prázdná bez potisku	1